


D-SUB		P10/J10 WEATHERPAK	FUNCTION
FROM	TO		
1	4	N/C	JUMPER
2	—	C	TXD
3	—	A	RXD
5	—	B	COM
7	—	D	RTS

* Note - Use the plug when the serial port is not connected to devices.

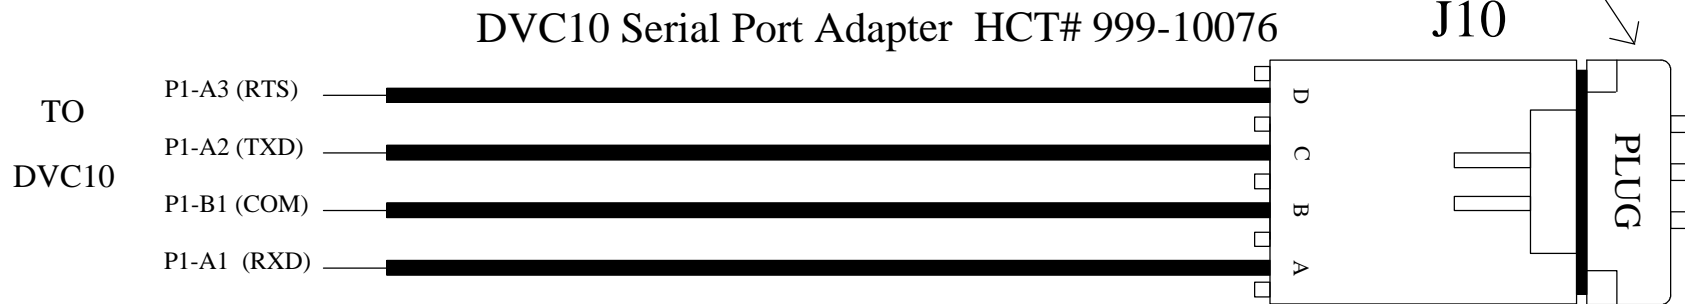

SIGNATURE		DATE	CHECKED BY R.W.H.		TITLE			
DRAWN: R.W.H.		10/26/00	DATE 10/26/00		DVC10 RS-232 CABLE ASSEMBLY & DVC10 SERIAL PORT ADAPTER			
ENGRG:		R.W.H.	TOLERANCES					
FINISH:			UNLESS OTHERWISE NOTED		SIZE	CAGE CODE	DWG NO	REV
MATL:			X.X	0.050"	A		999-10075/999-10076	A.2
			X.XX	0.010"	NOT TO SCALE		SHEET 1 OF 1	
			X.XXX	0.005"				
			ANGLES	0.500\$				